


2.00mm Pitch Pin Header, Socket Series



2003-NNA -103-




2003-NNB -104-



2003-NNC -105-




2003-NND -106-



2004-NNA -107-



2004-NNB -108-




2004-NNC -109-




2004-NND -110-



2004-NNS -111-



2004-NNSD -112-



2502-NNA -113-



2502-NND -114-



2502-NNSD -115-



FW0500-N -116-



FA0500-N -117-



FAU0500-N -118-

2.00mm Pitch Header & Socket

2003-NNA Pin Header Straight Single Low

Features And Specifications

Electrical

- Voltage Rating : 125VAC max
- Current Rating : 1A max
- Contact Resistance : 30m Ω max
- Insulation Resistance : 1,000M Ω min
- Dielectric Withstanding Voltage : 500VAC for 60 seconds

Physical


- Housing : UL94V-0 Nylon resin
- Pin : Brass, Tin or Gold Plated
- Operating Temperature : -55°C ~ +105°C

Reference Information

- Designed In : Millimeters



Dimensions (For Reference Only)

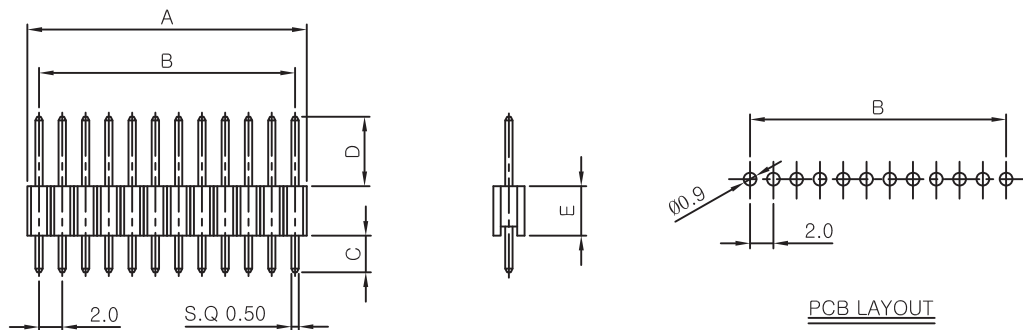

Ordering Information And Dimensions


MODEL NO.	A	B	C,D	E	MODEL NO.	A	B	C,D	E
2003-01A	2.00	-	OPTION	MOLD 1.2 2.0	2003-11A	22.00	20.00	OPTION	MOLD 1.2 2.0
2003-02A	4.00	2.00			2003-12A	24.00	22.00		
2003-03A	6.00	4.00			2003-13A	26.00	24.00		
2003-04A	8.00	6.00			2003-14A	28.00	26.00		
2003-05A	10.00	8.00			2003-15A	30.00	28.00		
2003-06A	12.00	10.00			2003-16A	32.00	30.00		
2003-07A	14.00	12.00			2003-17A	34.00	32.00		
2003-08A	16.00	14.00			2003-18A	36.00	34.00		
2003-09A	18.00	16.00			2003-19A	38.00	36.00		
2003-10A	20.00	18.00			2003-20A	40.00	38.00		
					2003-40A	80.00	78.00		

2.00mm Pitch Header & Socket


2003-NNB Pin Header Angle Single Low

Features And Specifications

- Electrical**
 - Voltage Rating : 125VAC max
 - Current Rating : 1A max
 - Contact Resistance : 30m Ω max
 - Insulation Resistance : 500M Ω min
 - Dielectric Withstanding Voltage : 500VAC for 60 seconds
- Physical**
 - Housing : UL94V-0 Nylon resin
 - Pin : Brass, Tin or Gold Plated
 - Operating Temperature : -55℃ ~ +105℃
- Reference Information**
 - Designed In : Millimeters

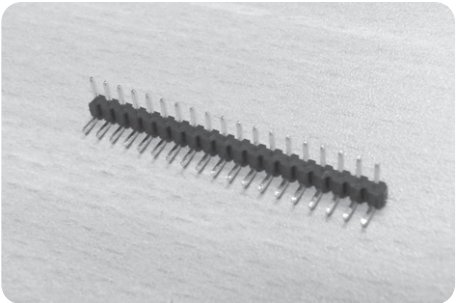

Dimensions (For Reference Only)

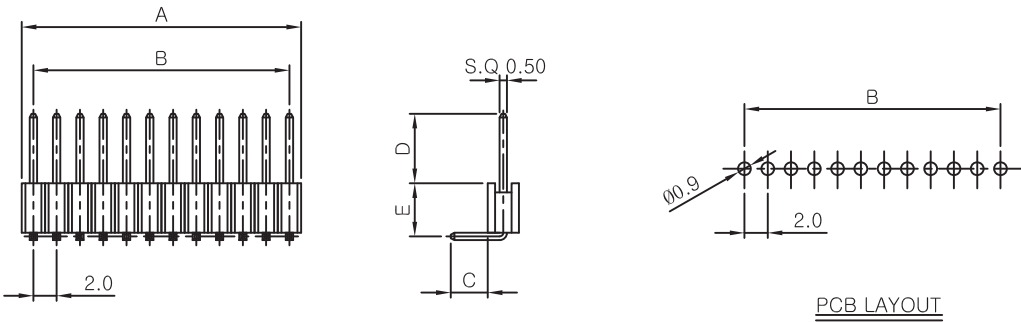

Ordering Information And Dimensions


MODEL NO.	A	B	C,D	E	MODEL NO.	A	B	C,D	E
2003-01B	2.00	-	OPTION	MOLD 1.2 2.0	2003-11B	22.00	20.00	OPTION	MOLD 1.2 2.0
2003-02B	4.00	2.00			2003-12B	24.00	22.00		
2003-03B	6.00	4.00			2003-13B	26.00	24.00		
2003-04B	8.00	6.00			2003-14B	28.00	26.00		
2003-05B	10.00	8.00			2003-15B	30.00	28.00		
2003-06B	12.00	10.00			2003-16B	32.00	30.00		
2003-07B	14.00	12.00			2003-17B	34.00	32.00		
2003-08B	16.00	14.00			2003-18B	36.00	34.00		
2003-09B	18.00	16.00			2003-19B	38.00	36.00		
2003-10B	20.00	18.00			2003-20B	40.00	38.00		
					2003-40B	80.00	78.00		

2.00mm Pitch Header & Socket


2003- NNC Pin Header Right Angle Single Low

Features And Specifications

- Electrical**
- Voltage Rating : 125VAC max
 - Current Rating : 1A max
 - Contact Resistance : 30m Ω max
 - Insulation Resistance : 1,000M Ω min
 - Dielectric Withstanding Voltage : 500VAC for 60 seconds
- Physical**
- Housing : UL94V-0 Nylon resin
 - Pin : Brass, Tin or Gold Plated
 - Operating Temperature : -55°C ~ +105°C
- Reference Information**
- Designed In : Millimeters

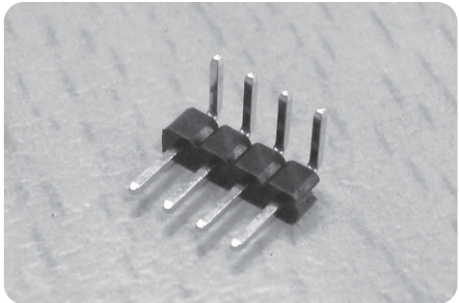

Dimensions (For Reference Only)

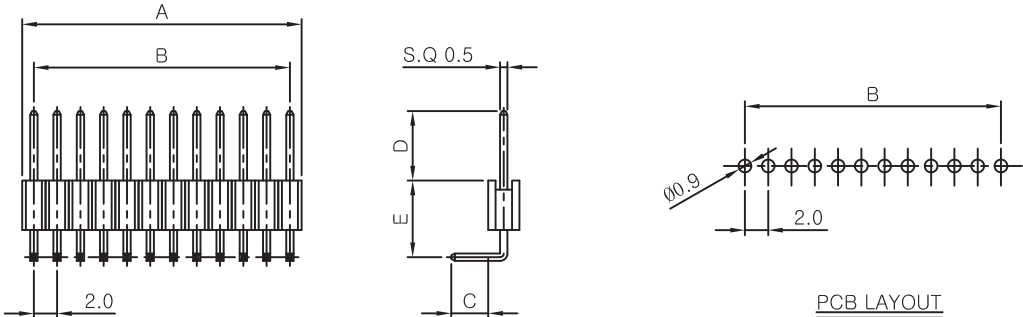

Ordering Information And Dimensions


MODEL NO.	A	B	C,D	E	MODEL NO.	A	B	C,D	E
2003-01C	2.00	-	OPTION	OPTION	2003-11C	22.00	20.00	OPTION	OPTION
2003-02C	4.00	2.00			2003-12C	24.00	22.00		
2003-03C	6.00	4.00			2003-13C	26.00	24.00		
2003-04C	8.00	6.00			2003-14C	28.00	26.00		
2003-05C	10.00	8.00			2003-15C	30.00	28.00		
2003-06C	12.00	10.00			2003-16C	32.00	30.00		
2003-07C	14.00	12.00			2003-17C	34.00	32.00		
2003-08C	16.00	14.00			2003-18C	36.00	34.00		
2003-09C	18.00	16.00			2003-19C	38.00	36.00		
2003-10C	20.00	18.00			2003-20C	40.00	38.00		
					2003-40C	80.00	78.00		

2.00mm Pitch Header & Socket


2003- NND Pin Header Tow Body Single Low

Features And Specifications

- Electrical**
 - Voltage Rating : 125VAC max
 - Current Rating : 1A max
 - Contact Resistance : 30m Ω max
 - Insulation Resistance : 1,000M Ω min
 - Dielectric Withstanding Voltage : 500VAC for 60 seconds
- Physical**
 - Housing : UL94V-0 Nylon resin
 - Pin : Brass, Tin or Gold Plated
 - Operating Temperature : -55 $^{\circ}$ C ~ +105 $^{\circ}$ C
- Reference Information**
 - Designed In : Millimeters

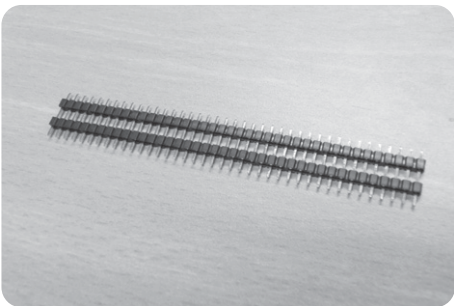

Dimensions (For Reference Only)

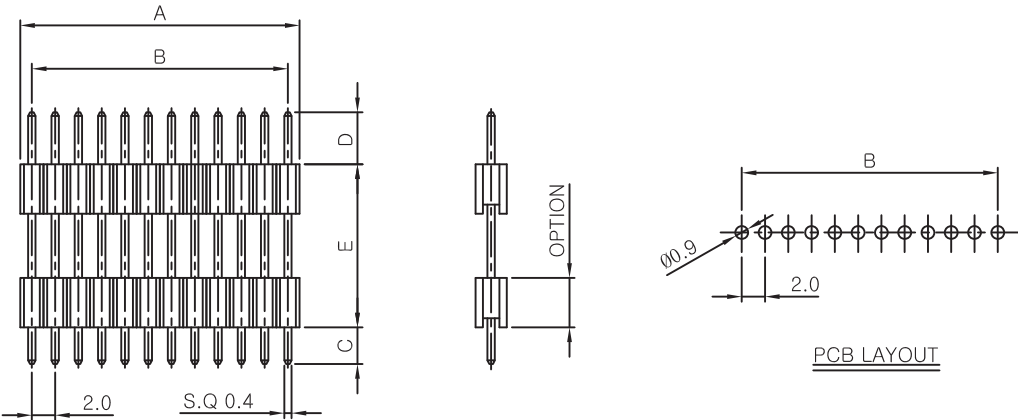

Ordering Information And Dimensions

MODEL NO.	A	B	C,D	E	MODEL NO.	A	B	C,D	E
2003-01D	2.00	-	OPTION	OPTION	2003-11D	22.00	20.00	OPTION	OPTION
2003-02D	4.00	2.00			2003-12D	24.00	22.00		
2003-03D	6.00	4.00			2003-13D	26.00	24.00		
2003-04D	8.00	6.00			2003-14D	28.00	26.00		
2003-05D	10.00	8.00			2003-15D	30.00	28.00		
2003-06D	12.00	10.00			2003-16D	32.00	30.00		
2003-07D	14.00	12.00			2003-17D	34.00	32.00		
2003-08D	16.00	14.00			2003-18D	36.00	34.00		
2003-09D	18.00	16.00			2003-19D	38.00	36.00		
2003-10D	20.00	18.00			2003-20D	40.00	38.00		
					2003-40D	80.00	78.00		

2.00mm Pitch Header & Socket

2004- NNA Pin Header Straight Dual Low

Features And Specifications

Electrical


- Voltage Rating : 125VAC max
- Current Rating : 1A max
- Contact Resistance : 30m Ω max
- Insulation Resistance : 1,000M Ω min
- Dielectric Withstanding Voltage : 500VAC for 60 seconds

Physical


- Housing : UL94V-0 Nylon resin
- Pin : Brass, Tin or Gold Plated
- Operating Temperature : -55°C ~ +105°C

Reference Information

- Designed In : Millimeters

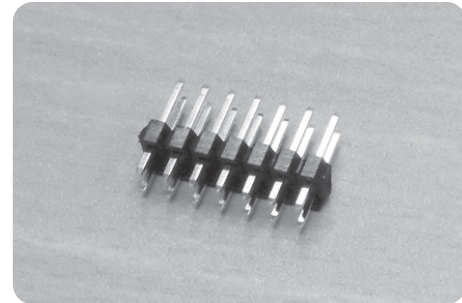

Dimensions (For Reference Only)

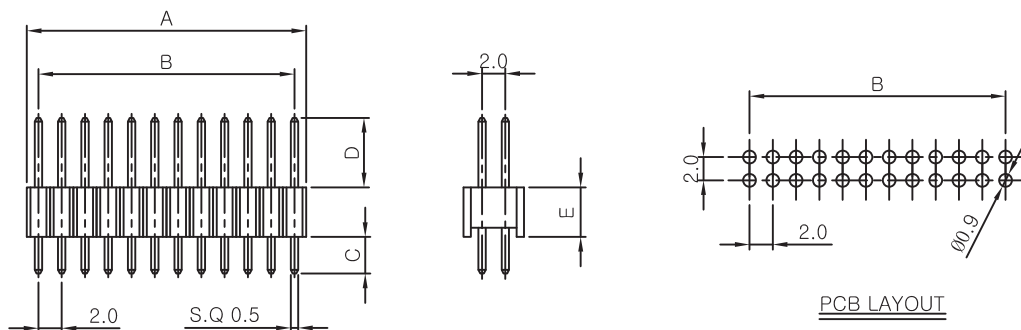

Ordering Information And Dimensions


MODEL NO.	A	B	C,D	E	MODEL NO.	A	B	C,D	E
2004-02A	2.00	-	OPTION	MOLD 1.0 2.0 2.4 5.4	2004-22A	22.00	20.00	OPTION	MOLD 1.0 2.0 2.4 5.4
2004-04A	4.00	2.00			2004-24A	24.00	22.00		
2004-06A	6.00	4.00			2004-26A	26.00	24.00		
2004-08A	8.00	6.00			2004-28A	28.00	26.00		
2004-10A	10.00	8.00			2004-30A	30.00	28.00		
2004-12A	12.00	10.00			2004-32A	32.00	30.00		
2004-14A	14.00	12.00			2004-34A	34.00	32.00		
2004-16A	16.00	14.00			2004-36A	36.00	34.00		
2004-18A	18.00	16.00			2004-38A	38.00	36.00		
2004-20A	20.00	18.00			2004-40A	40.00	38.00		
					2004-80A	80.00	78.00		

2.00mm Pitch Header & Socket


2004- NNB Pin Header Angle Dual Low

Features And Specifications

- Electrical**
 - Voltage Rating : 125VAC max
 - Current Rating : 1A max
 - Contact Resistance : 30m Ω max
 - Insulation Resistance : 1,000M Ω min
 - Dielectric Withstanding Voltage : 500VAC for 60 seconds
- Physical**
 - Housing : UL94V-0 Nylon resin
 - Pin : Brass, Tin or Gold Plated
 - Operating Temperature : -55 $^{\circ}$ C ~ +105 $^{\circ}$ C
- Reference Information**
 - Designed In : Millimeters

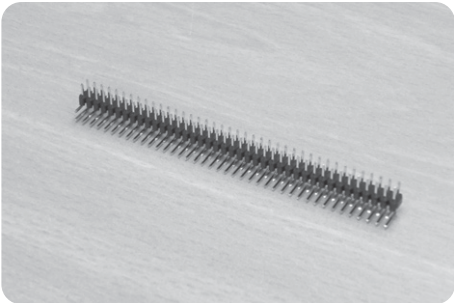

Dimensions (For Reference Only)

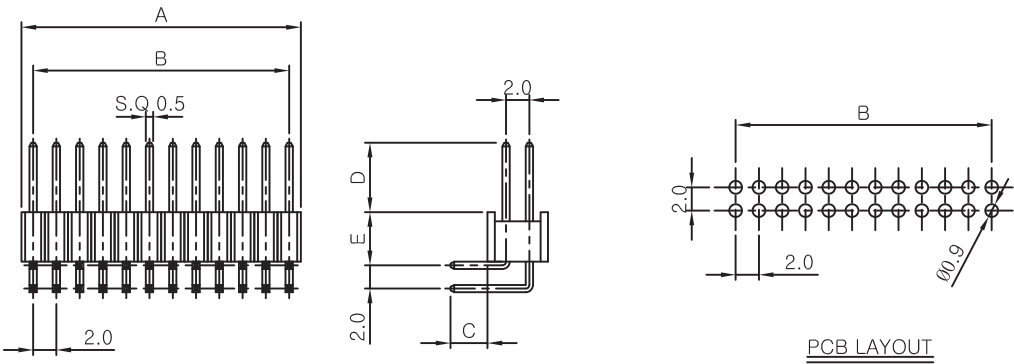

Ordering Information And Dimensions

MODEL NO.	A	B	C,D	E	MODEL NO.	A	B	C,D	E
2004-02B	2.00	-	OPTION	MOLD 1.0 2.0 2.4 5.4	2004-22B	22.00	20.00	OPTION	MOLD 1.0 2.0 2.4 5.4
2004-04B	4.00	2.00			2004-24B	24.00	22.00		
2004-06B	6.00	4.00			2004-26B	26.00	24.00		
2004-08B	8.00	6.00			2004-28B	28.00	26.00		
2004-10B	10.00	8.00			2004-30B	30.00	28.00		
2004-12B	12.00	10.00			2004-32B	32.00	30.00		
2004-14B	14.00	12.00			2004-34B	34.00	32.00		
2004-16B	16.00	14.00			2004-36B	36.00	34.00		
2004-18B	18.00	16.00			2004-38B	38.00	36.00		
2004-20B	20.00	18.00			2004-40B	40.00	38.00		
					2004-80B	80.00	78.00		

2.00mm Pitch Header & Socket

2004- NNC Pin Header Right Angle Dual Low

Features And Specifications

Electrical


- Voltage Rating : 125VAC max
- Current Rating : 1A max
- Contact Resistance : 30m Ω max
- Insulation Resistance : 1,000M Ω min
- Dielectric Withstanding Voltage : 500VAC for 60 seconds

Physical


- Housing : UL94V-0 Nylon resin
- Pin : Brass, Tin or Gold Plated
- Operating Temperature : -55°C ~ +105°C

Reference Information

- Designed In : Millimeters

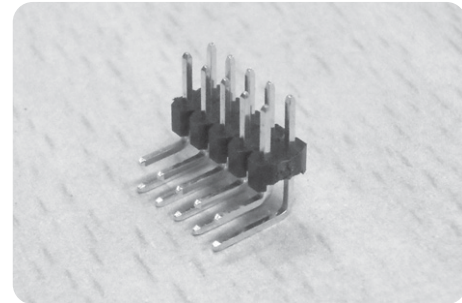

Dimensions (For Reference Only)

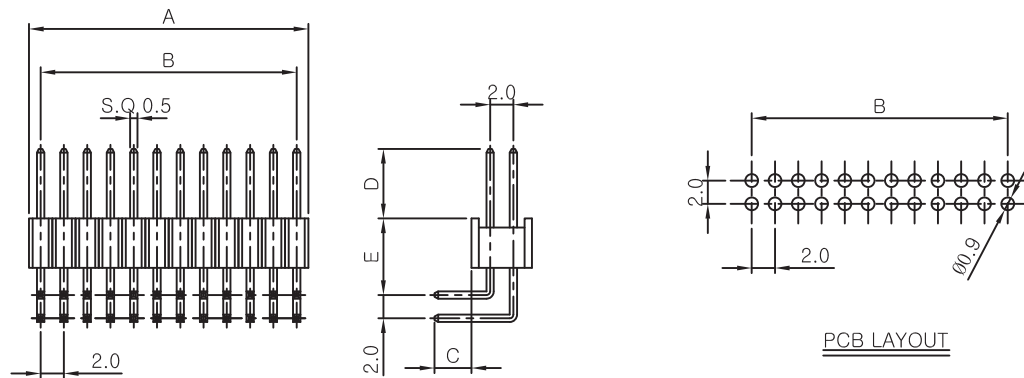

Ordering Information And Dimensions

MODEL NO.	A	B	C,D	E	MODEL NO.	A	B	C,D	E
2004-02C	2.00	-	OPTION	OPTION	2004-22C	22.00	20.00	OPTION	OPTION
2004-04C	4.00	2.00			2004-24C	24.00	22.00		
2004-06C	6.00	4.00			2004-26C	26.00	24.00		
2004-08C	8.00	6.00			2004-28C	28.00	26.00		
2004-10C	10.00	8.00			2004-30C	30.00	28.00		
2004-12C	12.00	10.00			2004-32C	32.00	30.00		
2004-14C	14.00	12.00			2004-34C	34.00	32.00		
2004-16C	16.00	14.00			2004-36C	36.00	34.00		
2004-18C	18.00	16.00			2004-38C	38.00	36.00		
2004-20C	20.00	18.00			2004-40C	40.00	38.00		
					2004-80C	80.00	78.00		

2.00mm Pitch Header & Socket

2004- NND Pin Header Two Body Dual Low

Features And Specifications

Electrical


- Voltage Rating : 125VAC max
- Current Rating : 1A max
- Contact Resistance : 30m Ω max
- Insulation Resistance : 1,000M Ω min
- Dielectric Withstanding Voltage : 500VAC for 60 seconds

Physical


- Housing : UL94V-0 Nylon resin
- Pin : Brass, Tin or Gold Plated
- Operating Temperature : -55°C ~ +105°C

Reference Information

- Designed In : Millimeters

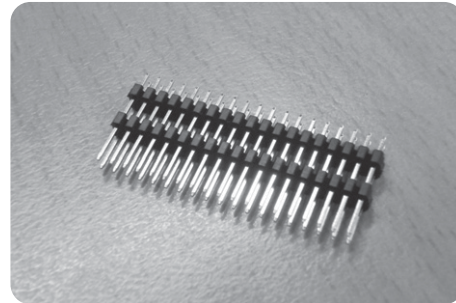

Dimensions (For Reference Only)

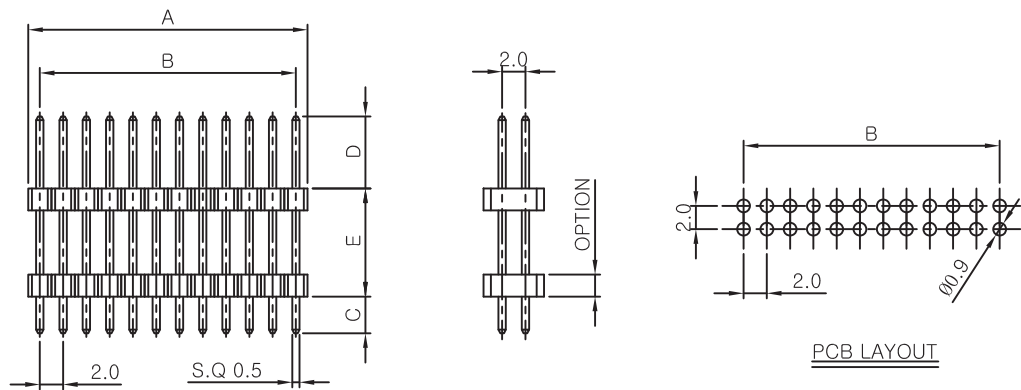

Ordering Information And Dimensions

MODEL NO.	A	B	C,D	E	MODEL NO.	A	B	C,D	E
2004-02D	2.00	-	OPTION	OPTION	2004-22D	22.00	20.00	OPTION	OPTION
2004-04D	4.00	2.00			2004-24D	24.00	22.00		
2004-06D	6.00	4.00			2004-26D	26.00	24.00		
2004-08D	8.00	6.00			2004-28D	28.00	26.00		
2004-10D	10.00	8.00			2004-30D	30.00	28.00		
2004-12D	12.00	10.00			2004-32D	32.00	30.00		
2004-14D	14.00	12.00			2004-34D	34.00	32.00		
2004-16D	16.00	14.00			2004-36D	36.00	34.00		
2004-18D	18.00	16.00			2004-38D	38.00	36.00		
2004-20D	20.00	18.00			2004-40D	40.00	38.00		
					2004-80D	80.00	78.00		

2.00mm Pitch Header & Socket

2004- NNS Pin Header SMT Dual Low

Features And Specifications

Electrical


- Voltage Rating : 125VAC max
- Current Rating : 1A max
- Contact Resistance : 30m Ω max
- Insulation Resistance : 1,000M Ω min
- Dielectric Withstanding Voltage : 500VAC for 60 seconds

Physical


- Housing : UL94V-0 Nylon resin
- Pin : Brass, Tin or Gold Plated
- Operating Temperature : -55°C ~ +105°C

Reference Information

- Designed In : Millimeters

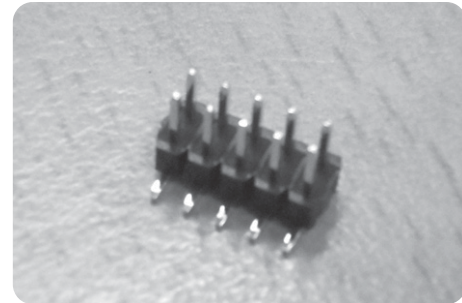

Dimensions (For Reference Only)

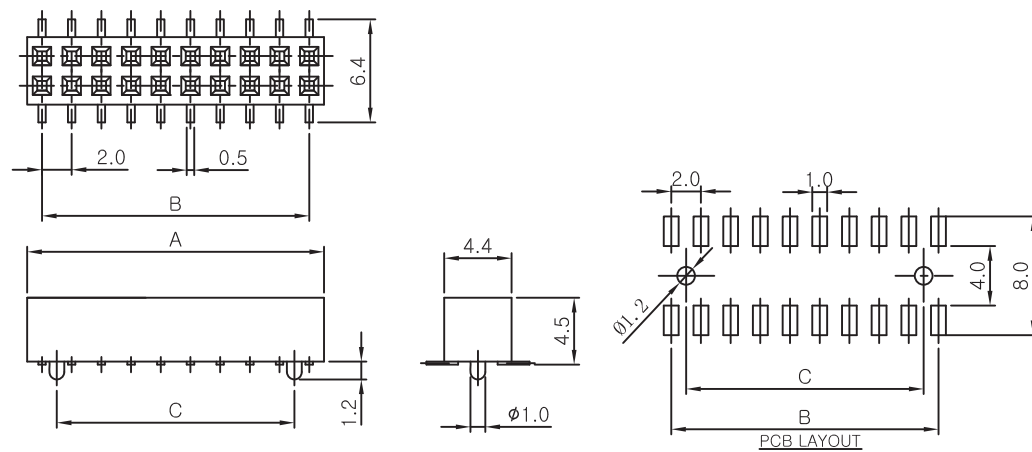

Ordering Information And Dimensions

MODEL NO.	A	B	C,D	E	MODEL NO.	A	B	C,D	E
2004-02S	2.00	-	OPTION	OPTION	2004-22S	22.00	20.00	OPTION	OPTION
2004-04S	4.00	2.00			2004-24S	24.00	22.00		
2004-06S	6.00	4.00			2004-26S	26.00	24.00		
2004-08S	8.00	6.00			2004-28S	28.00	26.00		
2004-10S	10.00	8.00			2004-30S	30.00	28.00		
2004-12S	12.00	10.00			2004-32S	32.00	30.00		
2004-14S	14.00	12.00			2004-34S	34.00	32.00		
2004-16S	16.00	14.00			2004-36S	36.00	34.00		
2004-18S	18.00	16.00			2004-38S	38.00	36.00		
2004-20S	20.00	18.00			2004-40S	40.00	38.00		
					2004-80S	80.00	78.00		

2.00mm Pitch Header & Socket

2004- NNSD Pin Header SMT Dual Low

Features And Specifications

Electrical


- Voltage Rating : 125VAC max
- Current Rating : 1A max
- Contact Resistance : 30m Ω max
- Insulation Resistance : 1,000M Ω min
- Dielectric Withstanding Voltage : 500VAC for 60 seconds

Physical


- Housing : UL94V-0 Nylon resin
- Pin : Brass, Tin or Gold Plated
- Operating Temperature : -55°C ~ +105°C

Reference Information

- Designed In : Millimeters

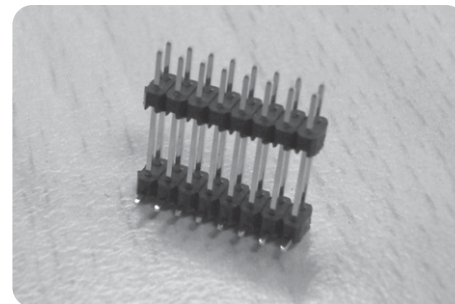

Dimensions (For Reference Only)

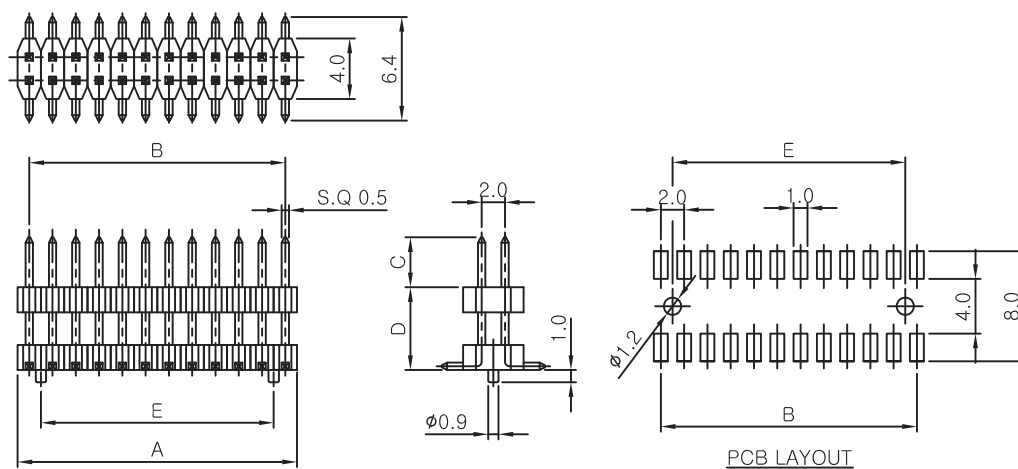

Ordering Information And Dimensions


MODEL NO.	A	B	C,D	E	MODEL NO.	A	B	C,D	E
2004-02SD	2.00	-	OPTION	OPTION	2004-22SD	22.00	20.00	OPTION	OPTION
2004-04SD	4.00	2.00			2004-24SD	24.00	22.00		
2004-06SD	6.00	4.00			2004-26SD	26.00	24.00		
2004-08SD	8.00	6.00			2004-28SD	28.00	26.00		
2004-10SD	10.00	8.00			2004-30SD	30.00	28.00		
2004-12SD	12.00	10.00			2004-32SD	32.00	30.00		
2004-14SD	14.00	12.00			2004-34SD	34.00	32.00		
2004-16SD	16.00	14.00			2004-36SD	36.00	34.00		
2004-18SD	18.00	16.00			2004-38SD	38.00	36.00		
2004-20SD	20.00	18.00			2004-40SD	40.00	38.00		
					2004-80SD	80.00	78.00		

2.00mm Pitch Header & Socket


2502- NNA Pin Socket Dip Single Low

Features And Specifications

- Electrical**
 - Voltage Rating : 125VAC max
 - Current Rating : 1A max
 - Contact Resistance : 30m Ω max
 - Insulation Resistance : 1,000M Ω min
 - Dielectric Withstanding Voltage : 500VAC for 60 seconds
- Physical**
 - Housing : UL94V-0 Nylon resin
 - Pin : Phosphor Bronze , Tin or Gold Plated
 - Operating Temperature : -55 $^{\circ}$ C ~ +105 $^{\circ}$ C
- Reference Information**
 - Designed In : Millimeters

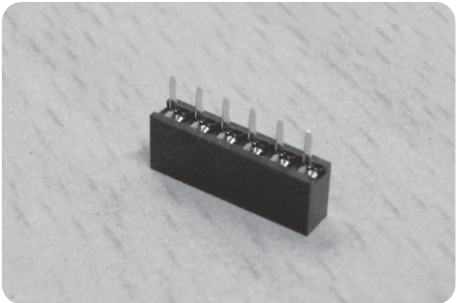

Dimensions (For Reference Only)

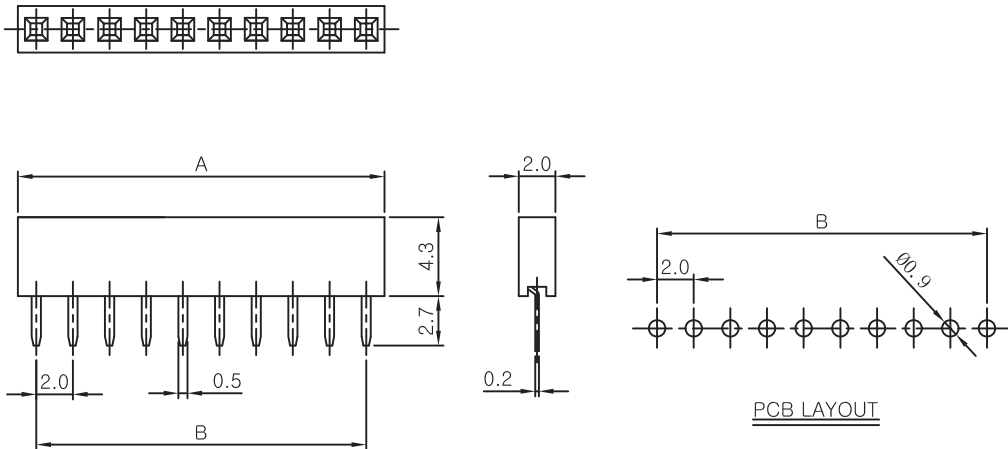

Ordering Information And Dimensions

MODEL NO.	A	B	MODEL NO.	A	B
2502-01A	2.00	-	2502-11A	22.00	20.00
2502-02A	4.00	2.00	2502-12A	24.00	22.00
2502-03A	6.00	4.00	2502-13A	26.00	24.00
2502-04A	8.00	6.00	2502-14A	28.00	26.00
2502-05A	10.00	8.00	2502-15A	30.00	28.00
2502-06A	12.00	10.00	2502-16A	32.00	30.00
2502-07A	14.00	12.00	2502-17A	34.00	32.00
2502-08A	16.00	14.00	2502-18A	36.00	34.00
2502-09A	18.00	16.00	2502-19A	38.00	36.00
2502-10A	20.00	18.00	2502-20A	40.00	38.00
			2502-40A	80.00	78.00

2.00mm Pitch Header & Socket

2502- NND Pin Socket Dip Dual Low

Features And Specifications

Electrical


- Voltage Rating : 125VAC max
- Current Rating : 1A max
- Contact Resistance : 30m Ω max
- Insulation Resistance : 1,000M Ω min
- Dielectric Withstanding Voltage : 500VAC for 60 seconds

Physical


- Housing : UL94V-0 Nylon resin
- Pin : Phosphor Bronze , Tin or Gold Plated
- Operating Temperature : -55°C ~ +105°C

Reference Information

- Designed In : Millimeters

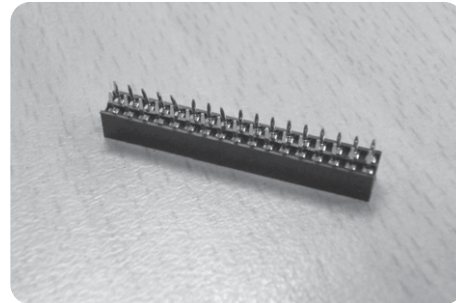

Dimensions (For Reference Only)

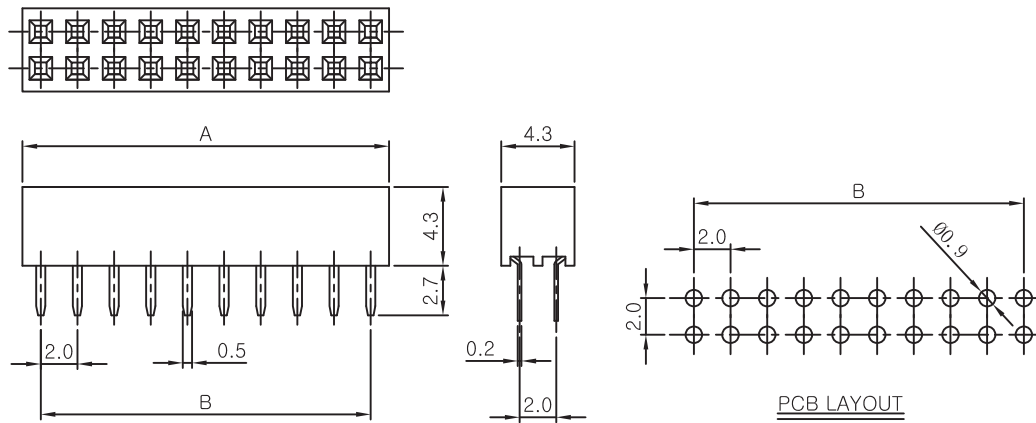

Ordering Information And Dimensions


MODEL NO.	A	B	MODEL NO.	A	B
2502-02D	2.00	-	2502-22D	22.00	20.00
2502-04D	4.00	2.00	2502-24D	24.00	22.00
2502-06D	6.00	4.00	2502-26D	26.00	24.00
2502-08D	8.00	6.00	2502-28D	28.00	26.00
2502-10D	10.00	8.00	2502-30D	30.00	28.00
2502-12D	12.00	10.00	2502-32D	32.00	30.00
2502-14D	14.00	12.00	2502-34D	34.00	32.00
2502-16D	16.00	14.00	2502-36D	36.00	34.00
2502-18D	18.00	16.00	2502-38D	38.00	36.00
2502-20D	20.00	18.00	2502-40D	40.00	38.00
			2502-80D	80.00	78.00

2.00mm Pitch Header & Socket


2502- NNSD Pin Socket SMT Dual Low

Features And Specifications

- Electrical**
 - Voltage Rating : 125VAC max
 - Current Rating : 1A max
 - Contact Resistance : 30m Ω max
 - Insulation Resistance : 1,000M Ω min
 - Dielectric Withstanding Voltage : 500VAC for 60 seconds
- Physical**
 - Housing : UL94V-0 Nylon resin
 - Pin : Phosphor Bronze , Tin or Gold Plated
 - Operating Temperature : -55 $^{\circ}$ C ~ +105 $^{\circ}$ C
- Reference Information**
 - Designed In : Millimeters

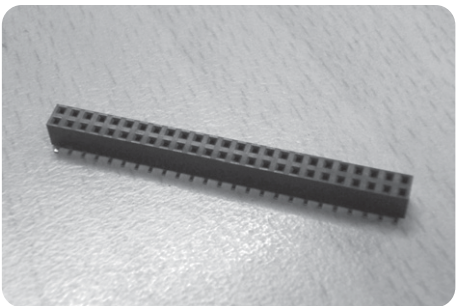

Dimensions (For Reference Only)

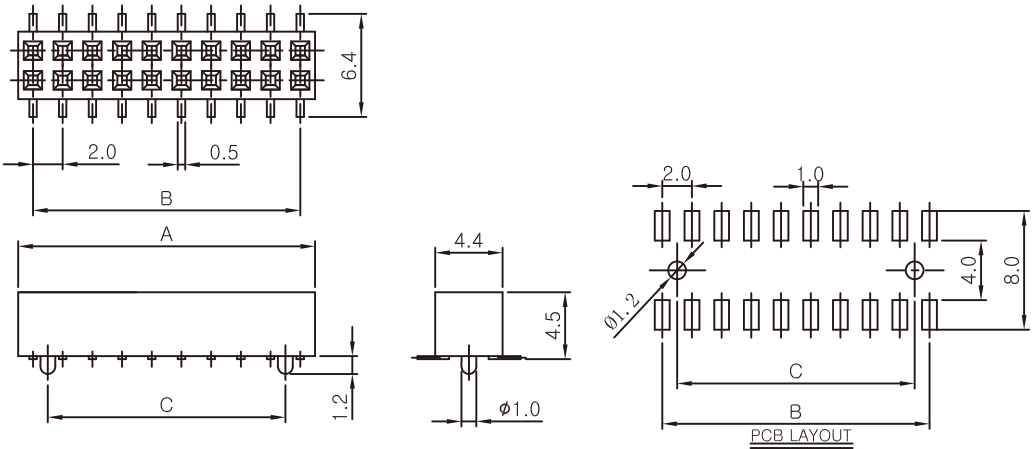

Ordering Information And Dimensions


MODEL NO.	A	B	MODEL NO.	A	B
2502-02SD	2.00	-	2502-22SD	22.00	20.00
2502-04SD	4.00	2.00	2502-24SD	24.00	22.00
2502-06SD	6.00	4.00	2502-26SD	26.00	24.00
2502-08SD	8.00	6.00	2502-28SD	28.00	26.00
2502-10SD	10.00	8.00	2502-30SD	30.00	28.00
2502-12SD	12.00	10.00	2502-32SD	32.00	30.00
2502-14SD	14.00	12.00	2502-34SD	34.00	32.00
2502-16SD	16.00	14.00	2502-36SD	36.00	34.00
2502-18SD	18.00	16.00	2502-38SD	38.00	36.00
2502-20SD	20.00	18.00	2502-40SD	40.00	38.00
			2502-80SD	80.00	78.00

2.00mm Pitch Header & Socket


FW 0500-N Flat Wafer

Features And Specifications

- Electrical**
 - Voltage Rating : 125VAC max
 - Current Rating : 1A max
 - Contact Resistance : 30m Ω max
 - Insulation Resistance : 1,000M Ω min
 - Dielectric Withstanding Voltage : 500VAC for 60 seconds
- Physical**
 - Housing : Nylon66, UL94V Grade
 - Pin : 0.5mm Square Brass Pin, Tin Plated
 - Operating Temperature : -40 $^{\circ}$ C ~ +105 $^{\circ}$ C
- Reference Information**
 - Packing : Bag
 - UL File No. : E92854
 - Designed In : Millimeters

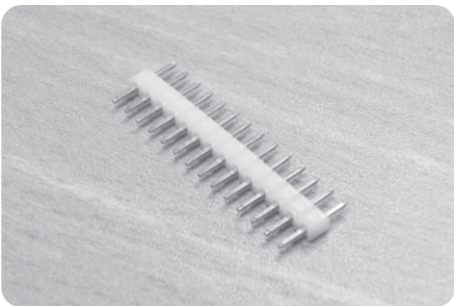

Dimensions (For Reference Only)

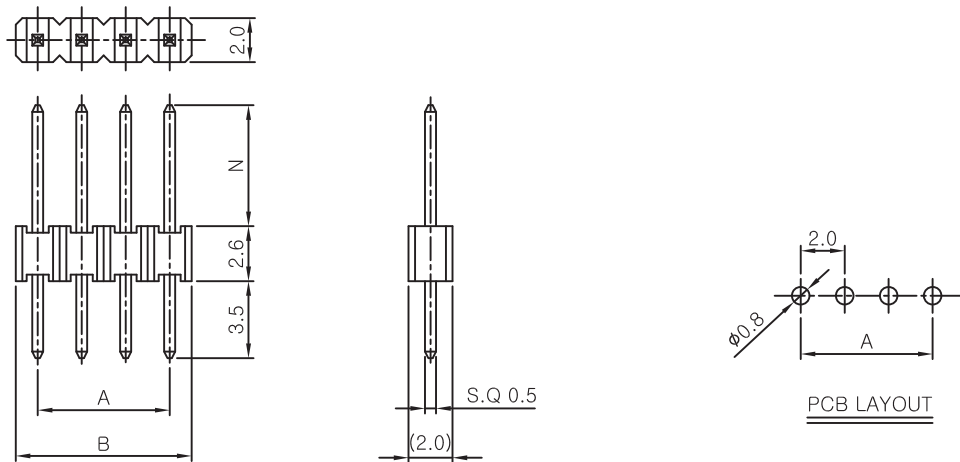

Ordering Information And Dimensions

CKT	MODEL NO.	A	B	CKT	MODEL NO.	A	B
2	FW0500-02	2.0	4.0	12	FW0500-12	22.0	24.0
3	FW0500-03	4.0	6.0	13	FW0500-13	24.0	26.0
4	FW0500-04	6.0	8.0	14	FW0500-14	26.0	28.0
5	FW0500-05	8.0	10.0	15	FW0500-15	28.0	30.0
6	FW0500-06	10.0	12.0	16	FW0500-16	30.0	32.0
7	FW0500-07	12.0	14.0	17	FW0500-17	32.0	34.0
8	FW0500-08	14.0	16.0	18	FW0500-18	34.0	36.0
9	FW0500-09	16.0	18.0	19	FW0500-19	36.0	38.0
10	FW0500-10	18.0	20.0	20	FW0500-20	38.0	40.0
11	FW0500-11	20.0	22.0				

2.00mm Pitch Header & Socket

FA 0500-N Flat Angle Wafer

Features And Specifications

Electrical


- Voltage Rating : 125VAC max
- Current Rating : 1A max
- Contact Resistance : 30m Ω max
- Insulation Resistance : 1,000M Ω min
- Dielectric Withstanding Voltage : 500VAC for 60 seconds

Physical


- Housing : Nylon66, UL94V Grade
- Pin : 0.5mm Square Brass Pin, Tin Plated
- Operating Temperature : -40°C ~ +105°C

Reference Information

- Packing : Bag
- UL File No. : E92854
- Designed In : Millimeters

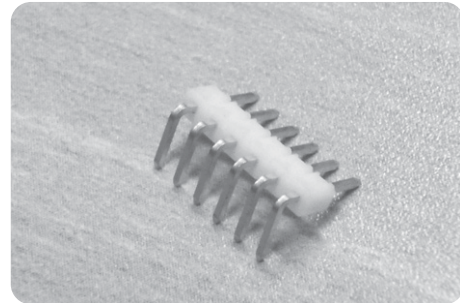

Dimensions (For Reference Only)

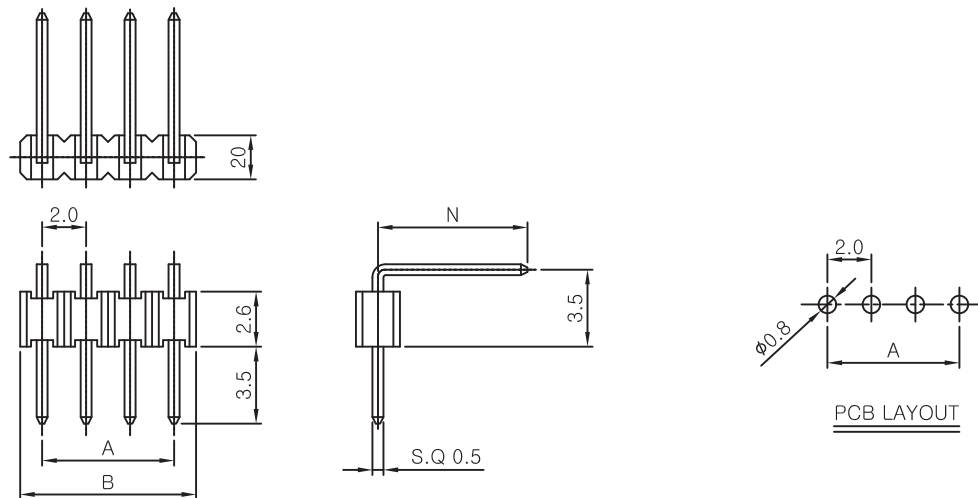

Ordering Information And Dimensions

CKT	MODEL NO.	A	B	CKT	MODEL NO.	A	B
2	FA0500-02	2.0	4.0	12	FA0500-12	22.0	24.0
3	FA0500-03	4.0	6.0	13	FA0500-13	24.0	26.0
4	FA0500-04	6.0	8.0	14	FA0500-14	26.0	28.0
5	FA0500-05	8.0	10.0	15	FA0500-15	28.0	30.0
6	FA0500-06	10.0	12.0	16	FA0500-16	30.0	32.0
7	FA0500-07	12.0	14.0	17	FA0500-17	32.0	34.0
8	FA0500-08	14.0	16.0	18	FA0500-18	34.0	36.0
9	FA0500-09	16.0	18.0	19	FA0500-19	36.0	38.0
10	FA0500-10	18.0	20.0	20	FA0500-20	38.0	40.0
11	FA0500-11	20.0	22.0				

2.00mm Pitch Header & Socket

FAU 0500-N Flat Angle Wafer

Features And Specifications

Electrical


- Voltage Rating : 125VAC max
- Current Rating : 1A max
- Contact Resistance : 30m Ω max
- Insulation Resistance : 1,000M Ω min
- Dielectric Withstanding Voltage : 500VAC for 60 seconds

Physical


- Housing : Nylon66, UL94V Grade
- Pin : 0.5mm Square Brass Pin, Tin Plated
- Operating Temperature : -40°C ~ +105°C

Reference Information

- Packing : Bag
- UL File No. : E92854
- Designed In : Millimeters

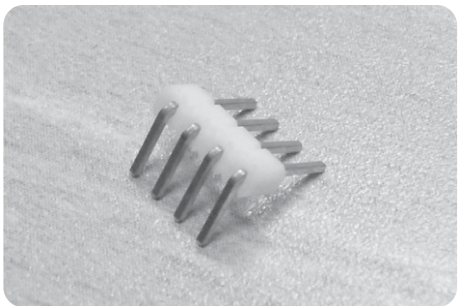

Dimensions (For Reference Only)

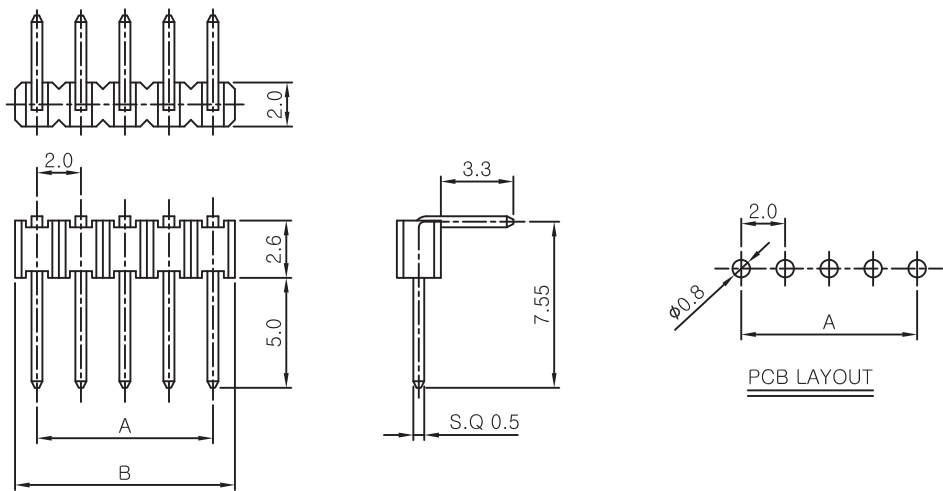

Ordering Information And Dimensions

CKT	MODEL NO.	A	B	CKT	MODEL NO.	A	B
2	FAU0500-02	2.0	4.0	12	FAU0500-12	22.0	24.0
3	FAU0500-03	4.0	6.0	13	FAU0500-13	24.0	26.0
4	FAU0500-04	6.0	8.0	14	FAU0500-14	26.0	28.0
5	FAU0500-05	8.0	10.0	15	FAU0500-15	28.0	30.0
6	FAU0500-06	10.0	12.0	16	FAU0500-16	30.0	32.0
7	FAU0500-07	12.0	14.0	17	FAU0500-17	32.0	34.0
8	FAU0500-08	14.0	16.0	18	FAU0500-18	34.0	36.0
9	FAU0500-09	16.0	18.0	19	FAU0500-19	36.0	38.0
10	FAU0500-10	18.0	20.0	20	FAU0500-20	38.0	40.0
11	FAU0500-11	20.0	22.0				